

Technical data sheet

Interface Technology · LCIS Mechanical Relay

Output Relay Interface, relay with 1 directional contact / SPDT relay
AC/DC 250 V, 6 A, 1500 VA / 144 W
Screw terminal / Push-In, contact material: AgSnO₂



Identification

Type	LCIS-RGA24DC-PI-1U
Part No.	761020.0000

Product version

Datasheet version	05
-------------------	----

Input

Rated voltage U_N	DC 24 V
Input voltage range	19.2 V – 30 V
Rated current I_N	10.7 mA
Protection device Input	Reverse diode
Max. length of connecting lead	DC: 1000 m
Status display input	LED green
Interrupting voltage	<1.7 V

Output

Contact type	1 changeover contacts / SPDT
Switching element	Relays
Min. switching voltage	AC/DC 17 V
Max. switching voltage	AC/DC 250 V
Min. switching current	AC/DC 5 mA
Max. switching current	AC/DC 6 A
Switching capacity DC 13	1 A @ 24 V 200 mA @ 125 V 100 mA @ 250 V
Switching capacity AC 15	3 A
Max. switching capacity	1500 VA / 144 W
Contact material	AgSnO ₂
Mechanical service life	> 10 x 10 ⁶ operations

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA
Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223
www.lutze.com • info@lutze.com

15.03.2024 • Subject to technical modification
Part No. [761020.0000](#) • Datasheet version: 05

Technical data sheet

Interface Technology · LCIS Mechanical Relay

Switch-on delay	5 ms
Shutdown delay	4 ms
Protection device	None
Max. length of connecting lead	DC: 1000 m
Degree of protection	IP20

General

Housing material	PA 6.6 (UL 94 V-0)
Color of the housing	RAL 7012 Basalt grey
Degree of protection	IP20
Mounting	DIN rail mountable TS35 (EN 60715)
Installation position	Any
Insulation voltage input / output	4.0 kV _{eff}
Safe isolation	yes
Clearance/creepage dist. (control/ load side)	>5.5 mm
Rated insulation voltage (EN 50178)	300 V
Connection type	Push-In Single wire 0.25 mm ² – 2.5 mm ² / AWG 24–14 Fine stranded wire with ferrule 0.25 mm ² – 1.5 mm ² / AWG 24–16
Strip length	8 mm
Dimensions (w × h × d)	6.2 mm × 93.0 mm × 73.0 mm
Weight/unit	0.03 kg
PU (units)	5

General ambient conditions

Operation temperature range	-25 °C ... +60 °C
Storage temperature range	-40 °C ... +80 °C
Relative air humidity	20 – 90 % RH, not condensing
Vibration resistance	0.7 g acc. to EN 60068-2-6


Approvals/Standards

Conformity	CE UKCA
Approvals	cULus (E135145) DNV (TAA000024Y)
Standards	EN 60947-1 EN 60947-5-1 EN 61000-6-2 EN 61000-6-4 UL 508 DNV-CG-0339


Technical data sheet

Interface Technology · LCIS Mechanical Relay

Dimensions

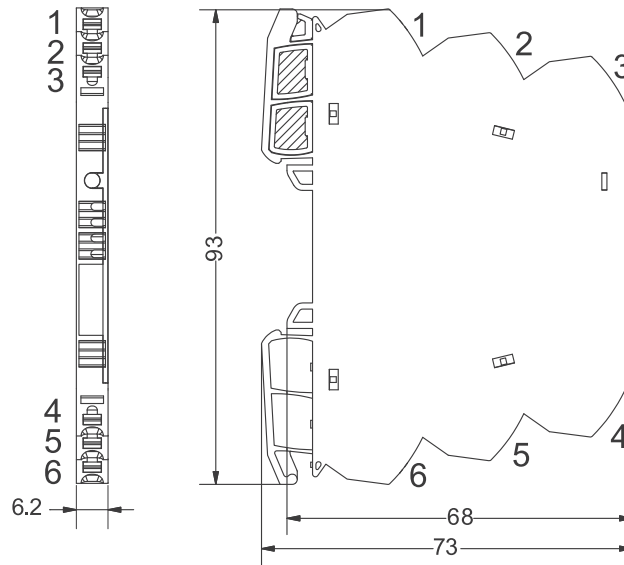

PIN assignment

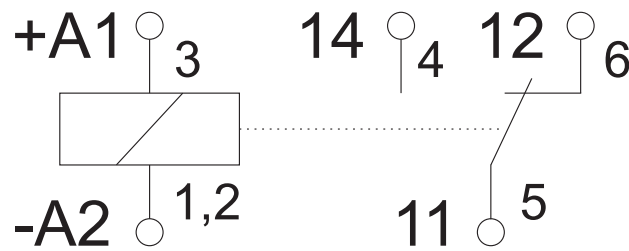

Use

