

## PT 4+F-BE

Order No.: 2839415

The illustration shows version PT 4-BE



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2839415>

Base element for protective plug PT with protective circuit for a 4-wire floating signal circuit, gas-filled surge arrester between the connections 3-4 (GND) and 9-10, for mounting on NS 35/7.5 and NS35/15, housing width: 17.5 mm

### Commercial data

GTIN (EAN)	4017918182823
sales group	J201
Pack	10 pcs.
Customs tariff	85363010
Weight/Piece	0.05637 KG
Catalog page information	Page 90 (TT-2009)

### Product notes

WEEE/RoHS-compliant since:  
03/03/2006



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

### Technical data

#### General

Inflammability class acc. to UL 94	V0
Color	black
Ambient temperature (operation)	-40 °C ... 85 °C
Mounting type	DIN rail 35 mm
Design	DIN rail module, two-section, divisible

Degree of protection	IP20
Direction of action	Signal Ground/Shield-Earth Ground
Width	17.70 mm
Height	65.50 mm
Length	90.00 mm
Pitch unit	1 Div.

**Protective circuit**

Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 600$ V
---	--------------

**Connection data**

Type of connection	Screw connection
Connection type IN	Screw terminal blocks
Connection type OUT	Screw terminal blocks
Screw thread	M3
Tightening torque	0.8 Nm
Stripping length	8 mm
Conductor cross section stranded min.	0.2 mm <sup>2</sup>
Conductor cross section stranded max.	2.5 mm <sup>2</sup>
Conductor cross section solid min.	0.2 mm <sup>2</sup>
Conductor cross section solid max.	4 mm <sup>2</sup>
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12

**Certificates / Approvals**

Certification

GOST, UL Listed

Certification Ex:

CUL-EX LIS, UL-EX LIS

**Accessories**

Item	Designation	Description
------	-------------	-------------

**Assembly**

2839295	SSA 3-6	shield fast connections for conductor diameter 3 - 6 mm. Potential connection cable: 200 mm, black
2839512	SSA 5-10	Shield fast connection for conductor diameters 5 - 10 mm. Potential connection cable: 200 mm, black

**Marking**

1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
0811228	X-PEN 0,35	Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm
1050004	ZB 5 :UNBEDRUCKT	Zack strip, unprinted, 10-section, for individual labeling with M-PEN, ZB-T or CMS system, pack is sufficient for 100 terminal blocks, for a terminal width of 5.2 mm, color: White
2715212	ZB 5,8,LGS:FORTL.ZAHLEN	Zack marker strip, 10-section, printed horizontally: with consecutive numbers, 1-10, 11-20 etc. up to 991-1000, color: white
1050305	ZB 5,8:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements
2715209	ZB 5,8:UNBEDRUCKT	Zack strip, unprinted, strips with 10 labels for individual labeling with M-PEN or CMS system, for terminal block width: 5.8 mm, color: White
1050295	ZB 5:SO/CMS	Zack strip, 10-section, divisible, special printing, marking according to customer requirements
0808642	ZBF 5:UNBEDRUCKT	Zack strip, flat, unprinted: 10-section, for individual labeling with M-PEN or ZBF-T, sufficient for 100 terminal blocks, color: white

**Additional products**


Item	Designation	Description
------	-------------	-------------

**General**

2858098	PT 2-ISDN-NT-ST	Surge protection plug for base element, for the protection of a double wire of the Uko interface (ISDN).
---------	-----------------	--

## Diagrams/Drawings

### Dimensioned drawing

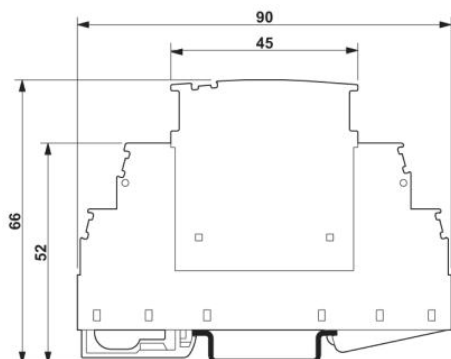

The figure shows the complete module consisting of a base element and connector

PT 4+F-BE Order No.: 2839415

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2839415>

---

**Address**

PHOENIX CONTACT Inc., USA  
586 Fulling Mill Road  
Middletown, PA 17057, USA  
Phone (800) 888-7388  
Fax (717) 944-1625  
<http://www.phoenixcon.com>



© 2010 Phoenix Contact  
Technical modifications reserved;