

# Product data sheet

Specifications

SQUARE D



Switch, manual, 30A, 3 pole, 10 HP at 575 VAC, three phase, toggle operated, no indicator, NEMA 4, two conduit opening

2510KW2H

Product availability: Stock - Normally stocked in distribution facility

Price\*: 424.75 USD

## Main

Product	Single Unit Manual Switch
Type	K

## Complementary

Current Rating	30 A
Cable Entry	0.75 NPT (top and bottom)
Horsepower Rating	2 hp 115 V AC 1 hp 90 V DC 2 hp 115 V DC 1.5 hp 230 V DC 7.5 hp 230 V AC 10 hp 460 V AC 10 hp 575 V AC
Maximum Voltage Rating	600 V AC 230 V DC
Number Of Poles	3P
Control Unit Type	Toggle
Number Of Phases	3 phase
Pilot Light	No indicator
Starter Type	Non reversing
Electrical Connection	Screw clamp terminals
Wire Gauge	AWG 14...AWG 10 copper
Height	4.38 in (111.25 mm)
Width	3 in (76.20 mm)
Depth	4.25 in (107.95 mm)

## Environment

Certifications	UL listed file E42243 CCN NLRV CSA LR25490 class 3211 05
Nema Enclosure Rating	NEMA 4 die cast zinc alloy standard size

## Ordering and shipping details

Category	21102-2510,2511,2512 K
Discount Schedule	CP1

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

<b>Gtin</b>	785901554721
<b>Returnability</b>	Yes
<b>Country Of Origin</b>	MX

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	3.80 in (9.652 cm)
<b>Package 1 Width</b>	4.80 in (12.192 cm)
<b>Package 1 Length</b>	5.50 in (13.97 cm)
<b>Package 1 Weight</b>	2.94 lb(US) (1.334 kg)
<b>Unit Type Of Package 2</b>	CAR
<b>Number Of Units In Package 2</b>	12
<b>Package 2 Height</b>	10.00 in (25.4 cm)
<b>Package 2 Width</b>	12.20 in (30.988 cm)
<b>Package 2 Length</b>	15.20 in (38.608 cm)
<b>Package 2 Weight</b>	36.22 lb(US) (16.429 kg)
<b>Unit Type Of Package 3</b>	PAL
<b>Number Of Units In Package 3</b>	336
<b>Package 3 Height</b>	40.00 in (101.6 cm)
<b>Package 3 Width</b>	40.00 in (101.6 cm)
<b>Package 3 Length</b>	48.00 in (121.92 cm)
<b>Package 3 Weight</b>	988.00 lb(US) (448.149 kg)

## Contractual warranty

<b>Warranty</b>	18 months
-----------------	-----------

## Sustainability

**Green Premium™** label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

## Well-being performance



Pvc Free

---

### Reach Regulation

[REACH Declaration](#)

---

### Eu Rohs Directive

Not compliant

---

### China Rohs Regulation

[China RoHS declaration](#)

Product out of China RoHS scope. Substance declaration for your information.

---


### California Proposition 65

WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

---

Wiring diagram

---

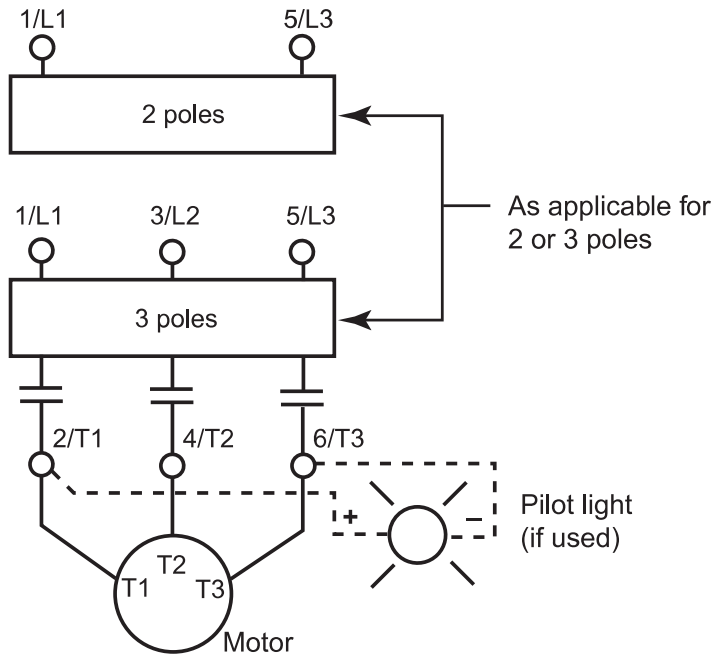

**NOTE:** The lamp is polarity sensitive in DC applications.