




Price\* : 93.00 USD

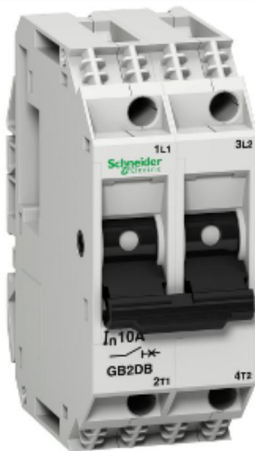

### Main

Range	TeSys
Product name	TeSys GB2
Device short name	GB2
Product or component type	Circuit breaker
Device application	Control
Poles description	2P
Network type	AC/DC
Utilisation category	Category A IEC 60947-2 DC-12 IEC 60947-5-1 DC-13 IEC 60947-5-1
Network frequency	50/60 Hz IEC 60947-2
Breaking capacity	3 kA Icu 110 V AC 50/60 Hz IEC 60947-2 1.5 kA Icu 230/240 V AC 50/60 Hz IEC 60947-2 1.5 kA Icu 400/415 V AC 50/60 Hz IEC 60947-2 1.5 kA Icu 24 V DC IEC 60947-2 1 kA Icu 48 V DC IEC 60947-2
[Ics] rated service short-circuit breaking capacity	75 % 110 V AC 50/60 Hz IEC 60947-2 75 % 230/240 V AC 50/60 Hz IEC 60947-2 75 % 400/415 V AC 50/60 Hz IEC 60947-2
Trip unit technology	Thermal-magnetic
Magnetic tripping current	108 A

### Complementary

Mounting mode	By clips
Mounting support	Plate Rail
Mounting position	Vertical Horizontal

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Control type	Toggle
Line Rated Current	8 A
[Ue] rated operational voltage	415 V AC 50/60 Hz IEC 60947-2 48 V DC
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-2
Power dissipation per pole	2 W
Mechanical durability	8000 cycles
Electrical durability	8000 cycles
Connections - terminals	connector 1 0.00...0.01 in <sup>2</sup> (0.75...6 mm <sup>2</sup> )solid without cable end connector 2 0.00...0.01 in <sup>2</sup> (0.75...4 mm <sup>2</sup> )solid without cable end connector 1 0.00...0.01 in <sup>2</sup> (0.75...4 mm <sup>2</sup> )flexible with cable end connector 2 0.00...0.00 in <sup>2</sup> (0.75...2.5 mm <sup>2</sup> )flexible with cable end
Tightening torque	10.62 lbf.in (1.2 N.m) connector
Mechanical robustness	Shocks 22 Gn for 20 ms IEC 60068-2-27 Vibrations 5 Gn, 5...110 Hz IEC 60068-2-6
Quantity per set	Set of 3
9 mm pitches	4
Maximum Height	2.91 in (74 mm)
Maximum Width	1.18 in (30 mm)
Maximum Depth	2.76 in (70 mm)
Net Weight	0.25 lb(US) (0.115 kg)

## Environment

Standards	EN/IEC 60947-1 EN/IEC 60947-2
Protective treatment	TC
IP degree of protection	IP20 IEC 60529
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Ambient air temperature for storage	-40...176 °F (-40...80 °C)
Fire resistance	1760 °F (960 °C) IEC 60695-2-1
Operating altitude	9842.52 ft (3000 m)

## Ordering and shipping details

Category	22631 - TELE CIRCUIT BREAKER (GB2)
Discount Schedule	I
GTIN	03389110865509
Nbr. of units in pkg.	3
Package weight(Lbs)	0.22 lb(US) (0.10 kg)
Returnability	No
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.23 in (8.2 cm)
Package 1 width	3.35 in (8.5 cm)
Package 1 Length	3.82 in (9.7 cm)
Unit Type of Package 2	BB1
Number of Units in Package 2	3
Package 2 Weight	12.24 oz (347 g)
Package 2 Height	3.23 in (8.2 cm)
Package 2 width	3.35 in (8.5 cm)
Package 2 Length	3.82 in (9.7 cm)
Unit Type of Package 3	S02
Number of Units in Package 3	36

Package 3 Weight	9.85 lb(US) (4.469 kg)
Package 3 Height	5.91 in (15 cm)
Package 3 width	11.81 in (30 cm)
Package 3 Length	15.75 in (40 cm)

### Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide which is known to the State of California to cause Carcinogen harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

### Contractual warranty

Warranty	18 months
----------	-----------