

Product data sheet

Specifications

SQUARE D

Green Premium™



Energy center, QO, 1 phase, 61 available circuits, 200A, PoN, ringed socket, semiflush, UG, solar, battery, gen ready

QOWC60M200PFY

Product availability: Stock - Normally stocked in distribution facility

Price*: 3,499.00 USD

Main

Product or Component Type	All-In-One
Range of Product	QO
Meter socket type	Ringed
Provided equipment	Wiser Energy kit Miniature circuit breaker 1) 2P 15 A Miniature circuit breaker 1) 1P 20 A Miniature circuit breaker 2) 2P 110 A Surge protection device (SPD) Type 2 120/240 V Socket-outlet 1) 20 A

Complementary

Line Rated Current	200 A
Load current	120 A alternate energy back feed
Number of Phases	1 phase
Short-circuit current	22 kA
Mounting	Semi flush
Number of spaces	60
Available number of spaces	51
Number of circuits	70
Available number of circuits	61
Number of Tandem Breakers	10
Electrical connection	Lugs, line side Lugs, service ground
Wire Size	AWG 4...250 kcmil (aluminium/copper) line side AWG 14...AWG 2/0 (aluminium/copper) service ground
Disconnect Rating	200 A
Branch Breaker Rating	90 A
Service feed location	UG
Bypass type	No bypass
Connections - Terminals	Plug-on neutral
Color	Matte white

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Product Compatibility	Solar ready Battery ready Generator ready
Width	28.5 in (723.9 mm)
Depth	9.01 in (228.9 mm)
Height	45.0000000000 in (1143 mm)
Bus Rating	225.0 A

Environment

NEMA Rating	NEMA 3R
--------------------	---------

Ordering and shipping details

Category	US1DE3A00099
Discount Schedule	DE3A
GTIN	03606481064493
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	19.875 in (50.483 cm)
Package 1 Width	40.0000000000 in (101.6 cm)
Package 1 Length	55.0000000000 in (139.7 cm)
Package 1 Weight	184.999 lb(US) (83.914 kg)
Unit Type of Package 2	PAL
Number of Units in Package 2	2
Package 2 Height	34.750 in (88.265 cm)
Package 2 Width	40.0000000000 in (101.6 cm)
Package 2 Length	55.0000000000 in (139.7 cm)
Package 2 Weight	5359.910 oz (151953.444 g)

Sustainability

Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

Well-being performance

 Mercury Free

 Rohs Exemption Information Yes

 Halogen Free Plastic Parts Product

Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Compliant with Exemptions

China Rohs Regulation [China RoHS declaration](#)
Product out of China RoHS scope. Substance declaration for your information.


Environmental Disclosure [Product Environmental Profile](#)

Circularity Profile No need of specific recycling operations

California Proposition 65 "WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov"

Image of product / Alternate images

Alternative

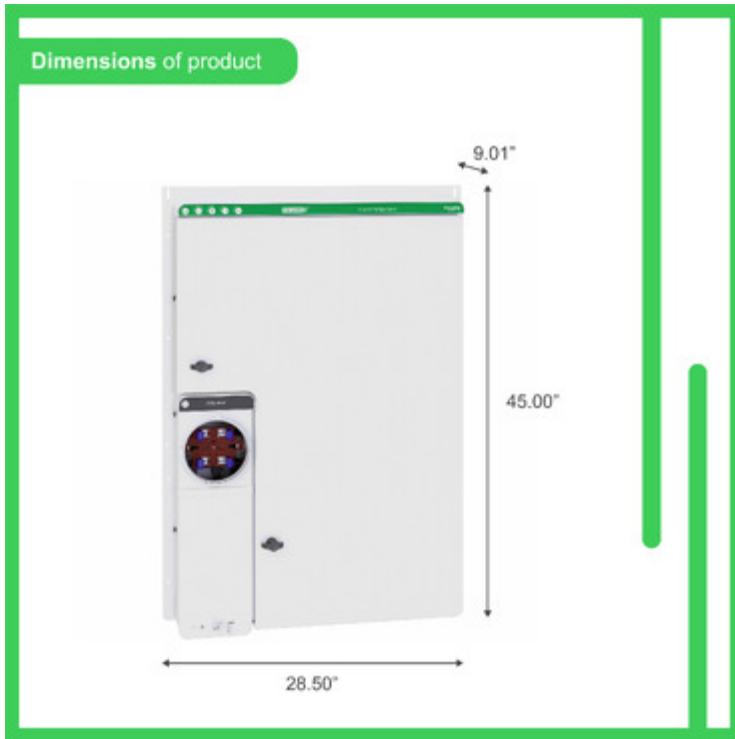

QO™

200A

1Ø, 120/240 V ~, 3 wires, 50/60 Hz, 225A Bus rating
1Ø, 120/240 V ~, 3 hilos, 50/60 Hz, valor nominal de la barra 225 A

60 Spaces Espacios	70 Circuits Circuitos
Rainproof A prueba de lluvia	Main Breaker Interruptor principal incluido
Ring Type Tipo anillo	Underground Feed Alimentación Subterránea

INCLUDES
INCLUYE



W31 in x H46 in x D10 in
132 lbs / 60 kg

